
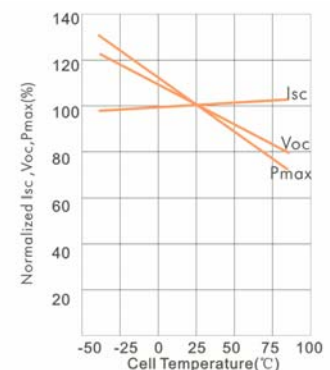
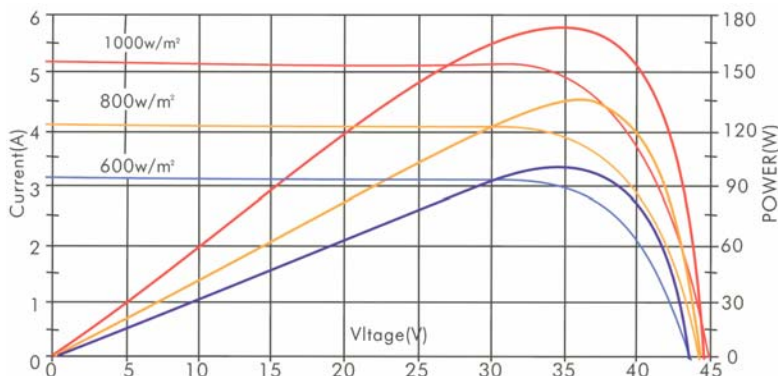
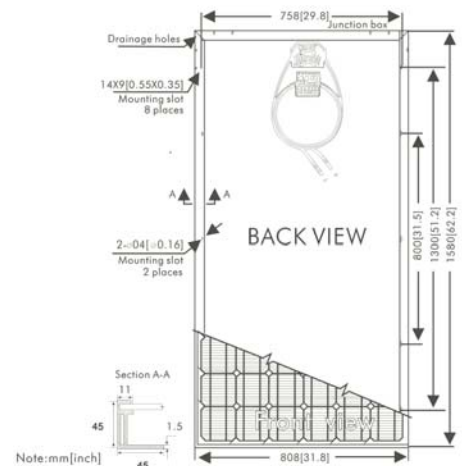


## SR-175 (45mm) Specifications

Model	SR-175
MONO/POLY	MONO
Maximum Power at STC (Pmax)	175Wp
Optimum Operating Voltage (Vmp)	36.20V
Optimum Operating Current (Imp)	4.85A
Open Circuit Voltage (Voc)	43.90V
Short Circuit Current (Isc)	5.30A
Number of Cells (Pcs)	72 Pcs
Size of Cell (mm)	125x125mm
Size of Module (mm)	1580*808*45mm
Cell Efficiency (%)	> 15.87%
Module Efficiency (%)	> 14.87%
Maximum System Voltage	1000VDC
Series Fuse Rating	15A
Power Tolerance (%)	±3%
Temperature Coefficients of Isc (%)	+(0.036~0.04)%/°C
Temperature Coefficients of Voc (%)	-0.34%/°C
Temperature Coefficients of Pm (%)	-0.48%/°C
Nominal Operating Cell Temperature (NOCT)	45±2°C
Operating Temperature	-40°C~+85°C
Weight Per Piece (kg)	16.5 Kg
Front Glass	3.2mm tempered glass
Junction Box	Cixi Renhe PV-RH0502B (TUV)
Connectors	MC-4
Frame (Material, Corners, etc.)	Anodized aluminum alloy
Standard Test Conditions	AM1.5 1000W/m <sup>2</sup> 25°C
Warranty	5 years product warranty, 10 years 90% of power and 25 years 80% of power

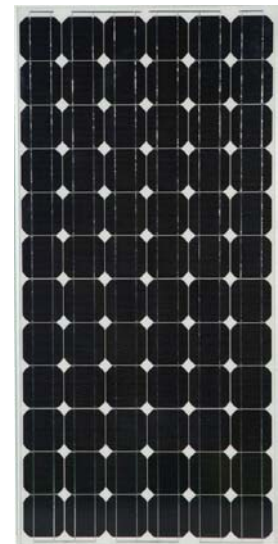

Specifications are subject to change without notice 24/1/09