

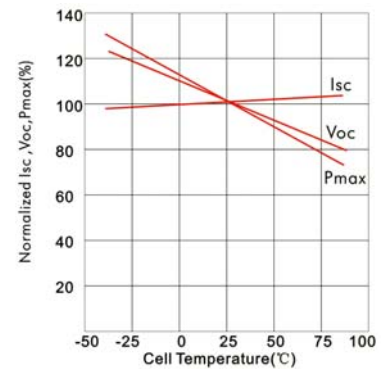


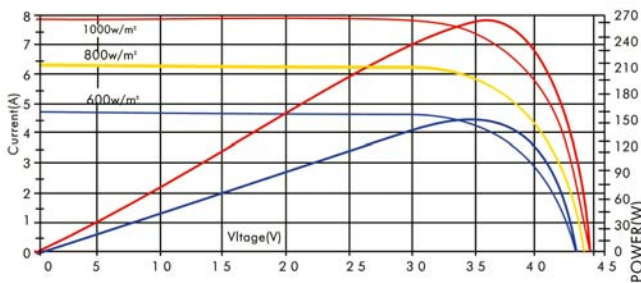

Ref:CTI/SR156P-260/241109

SR156P-260 Specifications

| | |
|---|---|
| Model | SR156P-260 |
| MONO/POLY | POLY |
| Maximum Power at STC (Pmax) | 260Wp |
| Optimum Operating Voltage (Vmp) | 34.7V |
| Optimum Operating Current (Imp) | 7.5A |
| Open Circuit Voltage (Voc) | 43.5V |
| Short Circuit Current (Isc) | 8.21A |
| Number of Cells (Pcs) | 72 Pcs |
| Size of Cell (mm) | 156x156mm cell |
| Size of Module (mm) | 1956*992*50mm |
| Cell Efficiency (%) | 13.39% |
| Module Efficiency (%) | 14.39% |
| Maximum System Voltage | 1000VDC |
| Series Fuse Rating | 20A |
| Power Tolerance (%) | ±3% |
| Temperature Coefficients of Isc (%) | + (0.055±0.01)%/°C |
| Temperature Coefficients of Voc (%) | - (0.34±0.01)%/°C |
| Temperature Coefficients of Pm (%) | - (0.48±0.05)/°C |
| Nominal Operating Cell Temperature (NOCT) | 45±2°C |
| Operating Temperature | -40°C ~ +85°C |
| Weight Per Piece (kg) | 27 Kg |
| Front Glass | 3.2mm tempered glass |
| Junction Box | Cixi Renhe PV-RH701 (TUV) |
| Frame (Material, Corners, etc.) | Anodized aluminum alloy |
| Standard Test Conditions | AM1.5 1000W/m ² 25°C |
| Warranty | 5 years product warranty, 10 years 90% of power and 25 years 80% of power |

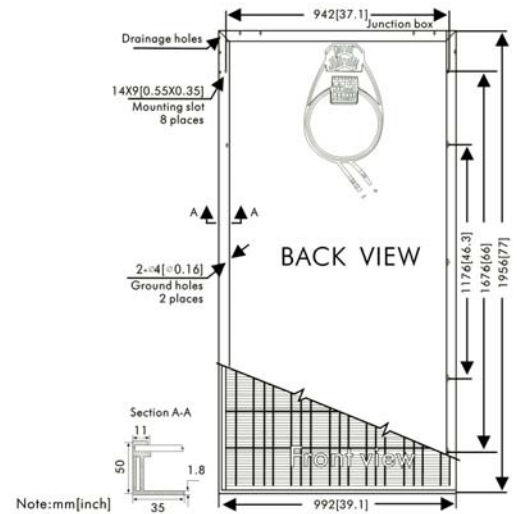

CTI Solar Limited
 1805 Wheelock House, 20 Pedder Street, Central, Hong Kong
 Tel: +852 2511 1783 Fax: +852 2511 1441
 www.cti-solar.com